

承 認 図

様




ダイヤケミカル株式会社
栃木県小山市城北2丁目2-1



ビーズ法ポリスチレンフォーム保温筒 承認図

※ 品質及び公差はJIS A 9511による。
(350A、400AはJIS G 3452 配管用炭素鋼鋼管の外径に準ずる内径)

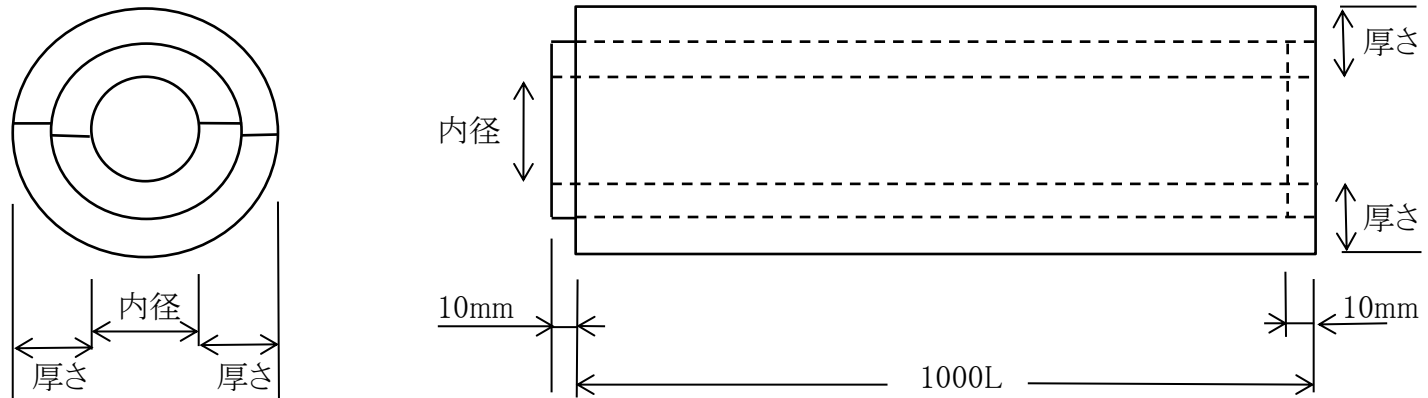

サイズ			内径(mm)	厚さ(mm)
15A	×	20	22	20
15A	×	25	22	25
15A	×	30	22	30
15A	×	40	22	40
15A	×	50	22	50
15A	×	65	22	65
20A	×	20	27	20
20A	×	25	27	25
20A	×	30	27	30
20A	×	40	27	40
20A	×	50	27	50
20A	×	65	27	65
25A	×	20	34	20
25A	×	25	34	25
25A	×	30	34	30
25A	×	40	34	40
25A	×	50	34	50
25A	×	65	34	65
32A	×	20	43	20
32A	×	25	43	25
32A	×	30	43	30
32A	×	40	43	40
32A	×	50	43	50
32A	×	65	43	65
32A	×	75	43	75
40A	×	20	49	20
40A	×	25	49	25
40A	×	30	49	30
40A	×	40	49	40
40A	×	50	49	50
40A	×	65	49	65
40A	×	75	49	75

サイズ			内径(mm)	厚さ(mm)
50A	×	20	61	20
50A	×	25	61	25
50A	×	30	61	30
50A	×	40	61	40
50A	×	50	61	50
50A	×	65	61	65
50A	×	75	61	75
50A	×	100	61	100
65A	×	20	76	20
65A	×	25	76	25
65A	×	30	76	30
65A	×	40	76	40
65A	×	50	76	50
65A	×	65	76	65
65A	×	75	76	75
65A	×	100	76	100
80A	×	20	89	20
80A	×	25	89	25
80A	×	30	89	30
80A	×	40	89	40
80A	×	50	89	50
80A	×	65	89	65
80A	×	75	89	75
80A	×	100	89	100
100A	×	20	114	20
100A	×	25	114	25
100A	×	30	114	30
100A	×	40	114	40
100A	×	50	114	50
100A	×	65	114	65
100A	×	75	114	75
100A	×	100	114	100

サイズ			内径(mm)	厚さ(mm)
125A	×	20	140	20
125A	×	25	140	25
125A	×	30	140	30
125A	×	40	140	40
125A	×	50	140	50
125A	×	65	140	65
125A	×	75	140	75
125A	×	100	140	100
150A	×	20	165	20
150A	×	25	165	25
150A	×	30	165	30
150A	×	40	165	40
150A	×	50	165	50
150A	×	65	165	65
150A	×	75	165	75
150A	×	100	165	100
200A	×	20	216	20
200A	×	25	216	25
200A	×	30	216	30
200A	×	40	216	40
200A	×	50	216	50
200A	×	65	216	65
200A	×	75	216	75
200A	×	100	216	100

サイズ			内径(mm)	厚さ(mm)
250A	×	20	267	20
250A	×	25	267	25
250A	×	30	267	30
250A	×	40	267	40
250A	×	50	267	50
250A	×	65	267	65
250A	×	75	267	75
250A	×	100	267	100
300A	×	20	319	20
300A	×	25	319	25
300A	×	30	319	30
300A	×	40	319	40
300A	×	50	319	50
300A	×	65	319	65
300A	×	75	319	75
300A	×	100	319	100
350A	×	50	355.6	50
400A	×	50	406.4	50